



**HLA** SNOW





# INDEX

1000 & 2000 Series - Features and Options . . . . .	4
1000 & 2000 Series - Models . . . . .	6
3000 Series - Features and Options . . . . .	8
3000 Series - Models . . . . .	10
4000 Series - Features and Options . . . . .	12
4000 Series - Models . . . . .	14
5000 Series - Features and Options . . . . .	16
5000 Series - Models . . . . .	18
SnowWing . . . . .	20
Razor Sectional Snowpusher . . . . .	22
Scatter Shot . . . . .	24
Specialty Blades . . . . .	26
Undercarriage Mount . . . . .	28
Specifications . . . . .	30







New Holland Boomer 3045 with the HLA 2000 SnowBlade

# FEATURES



## Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



## Adjustable Skid Shoes

Allow you to set cutting depth for optimum performance and prolonged cutting edge life.



## Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



## Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



## Lateral Float

Allows blade to follow ground contours for better clearing performance.



## Spring trip Mouldboard Blade

Allows blade to trip back if struck by hidden object limiting damage.

# 1000 & 2000 SERIES



John Deere 3032E with  
the HLA 2500 SnowPusher

## OPTIONS



### **Snowblade Marker**

Add this to your blade for better visibility and blade position awareness.



### **Boron Cutting Edges**

Boron long wearing reversible upgrades provide excellent cutting performance for use in mixed gravel, concrete and asphalt situations.

# 1000 & 2000 SERIES



## **MAX OPERATING WEIGHT: 3,000 lbs. 20 - 35 HORSEPOWER**

- 35 Degree Angle
- Available with manual or hydraulic angling
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip mouldboard
- High Tensile AR400 Skid Shoes
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 54" - 90" Widths
- 20" High mouldboard



## **MAX OPERATING WEIGHT: 5,000 lbs. 30 - 50 HORSEPOWER**

- 35 Degree Angle
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip mouldboard
- High Tensile AR400 Skid Shoes
- Crossover relief valve
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 5' - 8' Widths
- 24" High mouldboard





**MAX OPERATING WEIGHT: 5,000 lbs.  
30 - 50 HORSEPOWER**

- Double sidewall eliminates bulky brace
- Replaceable, reversible rubber cutting edge (non-tripping)
- High tensile AR400 adjustable steel skidbars
- 6' - 8' Widths
- 30" High mouldboard



**MAX OPERATING WEIGHT: 20,000 lbs.  
60 - 125 HORSEPOWER**

- Double sidewall eliminates bulky brace
- Replaceable, reversible rubber cutting edge (non-tripping)
- High tensile AR400 adjustable steel skidbars
- 10' - 16' Widths
- 38" High mouldboard







Kubota L6060 with  
the HLA 3000 SnowBlade

# FEATURES



## Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



## Adjustable Skid Shoes

Allow you to set cutting depth for optimum performance and prolonged cutting edge life.



## Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



## Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.




## Lateral Float

Allows blade to follow ground contours for better clearing performance. (not on SP3500)



## Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



## Floating End Plate Edge (3200W series Snowwing only)

Floating endplate edges follow surface contour for confident snow clearing.





# 3000 SERIES

John Deere 5075E with  
the HLA 3200W SnowWing

## OPTIONS



### Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



### Boron or Carbide Cutting Edges

Boron long wearing reversible upgrades provide excellent cutting performance for use in mixed gravel, concrete and asphalt situations.

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



### Flip Up End Plates


Our exclusive flip up endplates allow you to quickly and easily switch between angle blade and box blade. The end plates also feature spring trips and floating edges.



### Floating Blade Hinge

This option adds a mechanical float to the blade. This allows loaders that don't have a hydraulic float to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward.

# 3000 SERIES

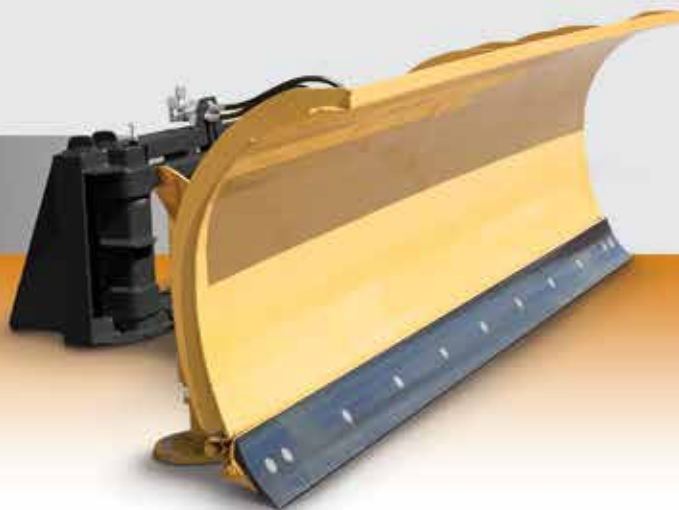

**MAX OPERATING WEIGHT: 10,000 lbs.  
30 - 80 HORSEPOWER**

- 35 Degree Angle
- Crossover Relief Valve
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Adjustable Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 6' - 10' Widths
- 30" High mouldboard



**MAX OPERATING WEIGHT: 10,000 lbs.  
50 - 85 HORSEPOWER**

- 6' to 10' Main mouldboard widths
- Maximum clearing width 5' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 30" deep/wide
- 30" High mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge

- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Adjustable lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 8200 in-lb. Torque at 3000 psi - Patented
- Tire Protection System - Patented




**MAX OPERATING WEIGHT: 15,000 lbs.  
30 - 80 HORSEPOWER**

- Double sidewall eliminates bulky brace
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High tensile AR400 adjustable steel skidbars
- 7' - 12' Widths
- 38" High mouldboard



New Holland T5.115 with  
the HLA 4200W SnowWing

# FEATURES



## Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



## Skid Shoes

AR400 high tensile Skid Shoes for optimum performance and prolonged cutting edge life.



## Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



## Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



## Spring Trip Endplates (4500 series Snowpusher only)

These HLA exclusive endplates give our box blades added protection and performance. Designed to move out of the way on impact and then spring back into place to keep on clearing.



## Lateral Float

Allows blade to follow ground contours for better clearing performance.



## Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



## Floating End Plate Edges

Floating endplate edges follow the surface contour for confident snow clearing.



# 4000 SERIES

Massey Ferguson 6290 with  
the HLA 4000 SnowBlade

## OPTIONS



### High Tensile Long Wear Skid Shoes

For heavy use situations we suggest our high tensile steel, long wear Skid Shoes. These provide excellent longevity and performance suited for heavy duty clearing on concrete or asphalt.



### Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



### Boron or Carbide Cutting Edges

Boron long wearing reversible upgrades provide excellent cutting performance for use in mixed gravel, concrete and asphalt situations.

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



### Flip Up End Plates

(4000 series Snowblade only)

Our exclusive flip up endplates allow you to quickly and easily switch between angle blade and box blade. The end plates also feature spring trips and floating edges.



### Floating Blade Hinge

This option adds a mechanical float to the blade. This allows loaders that don't have a hydraulic float to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward.

# 4000 SERIES



**MAX OPERATING WEIGHT: 25,000 lbs.  
60 - 125 HORSEPOWER**

- 35 Degree Angle
- Crossover Relief Valve
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Adjustable Lateral Float
- Spring trip Endplates (OPTIONAL)
- Clearing width approx. 1.5' narrower when angled
- 9' - 14' Widths
- 34" High mouldboard



**MAX OPERATING WEIGHT: 25,000 lbs.  
80 - 125 HORSEPOWER**

- 8' to 14' Main mouldboard widths
- Maximum clearing width 6' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 36" deep/wide
- 34" High mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Adjustable lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 15000 in-lb. Torque at 3000 psi - Patented
- Tire Protection System - Patented



**MAX OPERATING WEIGHT: 25,000 lbs.  
60 - 125 HORSEPOWER**

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Q-tach or direct fit to accept most makes of loaders
- 30" Deep Spring Trip Endplate
- 10' - 14' Widths
- 34" High mouldboard



Case 721F with  
the HLA 5500 SnowPusher

# FEATURES



## Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



## Skid Shoes

AR400 high tensile Skid Shoes for optimum performance and prolonged cutting edge life.



## Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



## Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



## Spring Trip Endplates

(5500 series Snowpusher only)

These HLA exclusive endplates give our box blades added protection and performance. Designed to move out of the way on impact and then spring back into place to keep on clearing.



## Lateral Float

Allows blade to follow ground contours for better clearing performance.



## Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



## Floating End Plate Edges

Floating endplate edges follow the surface contour for confident snow clearing.



# 5000 SERIES



Volvo L70G with  
the HLA 5206W SnowWing with Contour Option

## OPTIONS



### High Tensile Long Wear Skid Shoes

For heavy use situations we suggest our high tensile steel, long wear Skid Shoes. These provide excellent longevity and performance suited for heavy duty clearing on concrete or asphalt.



### Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



### Boron or Carbide Cutting Edges

Boron long wearing reversible upgrades provide excellent cutting performance for use in mixed gravel, concrete and asphalt situations.

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



### Flip Up End Plates

(5000 series Snowblade only)

Our exclusive flip up endplates allow you to quickly and easily switch between angle blade and box blade. The end plates also feature spring trips and floating edges.



### Floating Blade Hinge

This option adds a mechanical float to the blade. This allows loaders that don't have a hydraulic float to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward.

# 5000 SERIES



**MAX OPERATING WEIGHT: 40,000 lbs.  
90 - 200 HORSEPOWER**

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Q-tach or direct fit to accept most makes of loaders
- 36" Deep Spring Trip Endplate (OPTIONAL)
- Clearing width approx. 1.5' narrower when angled
- 10' - 16' Widths
- 42" High mouldboard



**MAX OPERATING WEIGHT: 40,000 lbs.  
110 - 200 HORSEPOWER**

- 9' to 16' Main mouldboard widths
- Maximum clearing width 6' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 36" deep/wide
- 42" high mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Adjustable lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 15000 in-lb. Torque at 3000 psi - Patented
- Tire Protection System - Patented



**MAX OPERATING WEIGHT: 40,000 lbs.  
110 - 200 HORSEPOWER**

- 9' to 16' Main mouldboard widths
- Maximum clearing width 12' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 72" deep/wide
- 42" high mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Adjustable lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0° - 180°
- Actuator has 27,000 in-lb. Torque at 3,000 PSI - Patented
- Tire Protection System - Patented



**MAX OPERATING WEIGHT: 40,000 lbs.  
90 - 200 HORSEPOWER**

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Q-tach or direct fit to accept most makes of loaders
- 36" Deep Spring Trip Endplate
- 12' - 16' Widths
- 42" High mouldboard





#### Box Blade

Traditional box blade.



#### Straight Blade

Up to 6' of extra clearing width when fully extended

## FEATURES



#### Rotary Actuators - PATENTED

These rugged units come from the construction industry and deliver 38,700 in. lbs of torque to hold the wings in place.

#### 180° Rotation

Infinitely and independently adjustable, our wings are rugged enough to stay put and give you control of any situation.




#### Floating End Plate Edges

Floating endplate edges follow the surface contour for confident snow clearing.

#### Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.

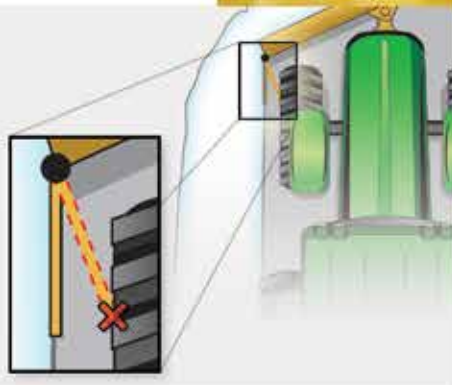

#### Tire Protection System - PATENTED

Our Tire Protection System means that you get the most out of your Snow Wing while keeping the air in your tires. The system automatically protects from unintended damaging collisions between your front tires and end plates. The end plates are automatically rotated away from the tires so the operator can focus on clearing snow and worry less about damaging equipment.



The Wingblade design allows you to handily change from a traditional box blade to a straight blade, with the added bonus of extra clearing width. But it doesn't stop there: the endplates are hydraulically-controlled and equipped with industry-proven rotary actuators, giving you rugged and limitless control within the massive 180 degree rotation. This means you can use your blade on an angle with one end open and the other parallel to

the direction you are driving. This allows you to get closer to buildings and parking stones with less chance of damage and better clearing results. With the endplates in their full open position, the blade can be used as a reverse box blade allowing you to back drag snow for full clearing even in the tightest of spaces.



#### Minimum Road Transfer Width

Approx. 9" narrower than main mouldboard width.

**PATENTED**



#### Reverse Box Blade

In full position

## OPTIONS



#### Wing Control Remote

Wired joystick allows all blade functions to be operated from a single joystick.



**CONTOUR  
WING DESIGN**  
DESIGNED FOR  
TRUCK LOTS

Available only on the 5206W SnowWing



# HLA RAZOR SNOWPUSHER

## Easily clear snow with a new Razor from HLA Snow.

Get a cleaner shave in one pass with the Razor Sectional Snow Pusher from HLA Snow. Each 24" wide section of the mouldboard floats independently allowing it to adjust to the contours of the ground.

Each section is equipped with a steel cutting edge, ensuring each blade cleanly shaves the snow as it passes across the ground. The cutting edges are backed with a spring trip, flipping the edge back as it strikes an obstacle. This not only reduces hang up, but also helps to prevent unnecessary shock to the operator and the equipment. When damaged or worn, the cutting edge can be easily reversed or replaced individually as required.

The dual tripping mechanism is built around a single expansion spring for each of the 24" sections. Increasing or decreasing the spring tension allows the section trip to be adjusted to suit the environment you're clearing, making this the best tool in your fleet.

A durable frame provides all the support that the blades need to handle tough jobs such as stacking. Parallel square tubes provide a solid anchor point for the parallel linkage, ensuring that the mouldboards maintain perfect vertical travel throughout the tripping action.

Razor Sectional Snow Pushers from HLA Snow, it's a black or white decision.

Part #	Width (ft.)	Number of Sections	Mouldboard Height (in.)	Weight (lbs.)
RZ450010	10	5	34	2,550
RZ450012	12	6	34	2,915
RZ450014	14	7	34	3,295



**MAX OPERATING WEIGHT: 25,000 lbs.**







**1 24" Floating Sections**  
Floating sections rise and fall to follow the terrain for a total float of 6 inches.

**2 Steel Cutting Edge**  
Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.

**3 Spring Trip**  
Each section features a spring trip cutting edge that activates when an obstacle is struck.

**4 Float Range Indicator**  
Helps the operator set proper loader height for optimal section travel.

**5 Square Tube Frame**  
Solid structure prevents flexing.

**6 Steel Linkage**  
Each section is attached to the frame using parallel steel linkages to maintain mouldboard alignment and allows for stacking.

**7 End Plates**  
End plates float with the end section and feature a floating skidbar that follows ground contour.

**8 Flexible Mount Options**  
Allows a wide range of adaptors to attach to the Razor.



# SCATTER SHOT



40 FOOT  
BROADCAST

## SINGLE SHOT HS100

The Scattershot makes short work of your spreading tasks. This broadcast spreader comes in Singleshot and Doubleshot models.

The ice won't know what hit him when you take aim with the Singleshot broadcast spreader. The half yard hopper is also a durable scoop ready to load and reload at a moment's notice (on select models).

Made of durable galvanized steel, the Scattershot can handle what it dishes out. From sand to salt the internal agitators prevent material from clumping or building up so you get the most out of every load.

Add the optional 3 foot drop shield and this broadcast spreader is ready to take on paths and sidewalks without a lot of overspray.



60 FOOT  
BROADCAST

## DOUBLE SHOT HS200


Unload both barrels on your biggest jobs with the Doubleshot. This dual broadcast spreader can spread up to 60 feet wide. The twin hoppers are combined into a yard and a half capacity scoop that self loads with ease.

Give your plow all the back up it needs with the 3-point mount. Now you can plow, load and spread all with one machine.





HS100 Skidsteer



HS100 3PH



HS100 PTO



HS200



HS200 3PH

Model	Self Loading	Capacity	Width (in.)	Height (in.)	Depth (in.)	Weight (lb.)	Hydraulic
<b>HS100</b>							
HS100 Skidsteer	Yes	1/2 Yard	48"	44"	36"	440 lb.	Yes
HS100 3PH	Yes	1/2 Yard	48"	44"	36"	530 lb.	Yes
HS100 PTO	No	1/2 Yard	48"	44"	36"	460 lb.	No
<b>HS200</b>							
HS200	Yes	1-1/2 Yard	86"	60"	42"	1,425 lb.	Yes
HS200 3PH	Yes	1-1/2 Yard	86"	60"	42"	1,640 lb.	Yes

**ALL MODELS AVAILABLE IN LOADER MOUNT OR 3-POINT HITCH**


## FEATURES



**Manual Flow Rate  
Adjustment Slider**



**Floating Agitator**

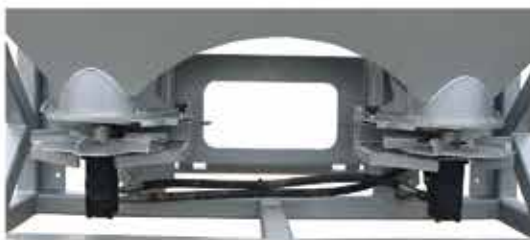

**Hydraulic Spinners**




**Spinner Speed Control**

## OPTIONS



**Hydraulic Shut-Off Gate**



**36" Sidewalk Drop  
Shield**

# SPECIALTY BLADES



Clean your sidewalks easily and effectively using the Six-Way blade from HLA Snow. Both sides of the Six-Way blade can be moved independently to form an angle blade, scoop, or V-Blade to ensure you have the right blade for every condition.

The Six-Way comes standard with spring trip cutting edges, ensuring the cutting edge springs back when the blade strikes an obstacle reducing damage to both the blade and equipment. Each model also comes standard with individually replaceable and reversible steel cutting edges, allowing you to get twice the life before needing to replace them when required. Rubber cutting edges are available as an option allowing your Six-Way to hug the contour of your lot for an even cleaner finish.



- Ideal sidewalk blade for compact tractors & skidsteers
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- 35 Degree angle with cross over relief valve protection
- 30" High mouldboard with lateral float
- 54" to 84" Widths (6" increments)
- AR400 cutting edge

**MAX OPERATING WEIGHT: 10,000 lbs.  
30 - 80 HORSEPOWER**



- Ideal for small roadways & driveways
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- 35 Degree angle with cross over relief valve protection
- 34" High mouldboard with lateral float
- 96" to 144" Widths
- Standard Carbon cutting edge, optional Boron and Carbide cutting edge

**MAX OPERATING WEIGHT: 25,000 lbs.  
60 - 125 HORSEPOWER**



Scoop



V-Blade



Angle Blade (right & left)

# V-BLADE

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- Q-tach or direct fit to accept most makes of loaders
- 48" to 60" Widths (6" increments)

**MAX OPERATING WEIGHT: 10,000 lbs.  
30 - 80 HORSEPOWER**



## Front Shoe

Front Shoe guides blade over obstacles, avoiding damage to equipment and property.



## Sliding Hinge

Sliding Hinge allows blade to follow contour of surface.

# SNOW BUCKET

- 38" Deep
- 32" High
- 60" to 120" Widths (6" increments)

**MAX OPERATING WEIGHT: 20,000 lbs.  
50 - 125 HORSEPOWER**



## Heavy Duty Grating

Allows extra visibility for the driver.






# UNDERCARRIAGE MOUNT



## ① Power and Control

- Heavy duty parallel linkage for optimum lifting height
- Q-Tach from blade to undermount is standard
- Euro mount standard on the 3000 and 4000 series
- Industrial mount standard on the 5000 series
- Package includes all mounting hardware and hose kits
- Mounts available for most makes, call dealer for details
- Soft ride accumulator

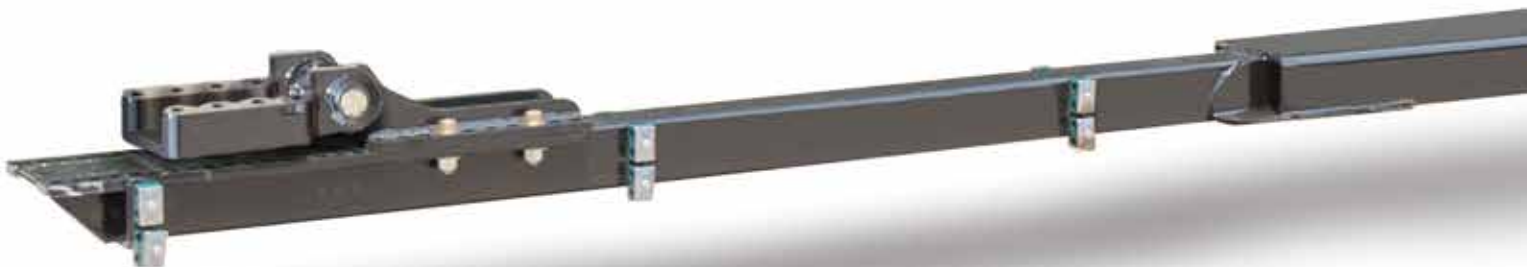





The HLA Undercarriage Mount is securely connected to both the front and rear of your tractor. Relying on the rear of the mount, the force is pushed through the draw-bar from the front of the mount providing incredible pushing strength. Also using parallel linkage, you can rest assured that the blade will always remain parallel to the ground whether it's raised for stacking snow or at full angle.

Available for most makes, the undercarriage mount includes all hardware and hose kits allowing for easy installation.

## Models

MODEL	PART #	WEIGHT
2000 Series	SB2000DM	400 lbs.
3000 Series	SB3000DM	580 lbs.
4000 Series	SB4000DM	1,020 lbs.
5000 Series	SB5000DM	1,860 lbs.



### 2 Parallel Vertical Lift

- Blade remains parallel to ground even at full angle and raised
- Extra height for piling snow

# SPECIFICATIONS

## SNOWBLADES

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
--------	-------------	-------------------------	---------------	----------------------

### 1000 Series Snowblades

SB100054	54	20	300	3,000 lbs.
SB100060	60	20	310	
SB100066	66	20	325	
SB100072	72	20	335	
SB100078	78	20	345	
SB100084	84	20	365	
SB100090	90	20	385	

### 2000 Series Snowblades

SB200060	60	24	460	5,000 lbs.
SB200072	72	24	490	
SB200078	78	24	505	
SB200084	84	24	535	
SB200090	90	24	565	
SB200096	96	24	595	

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
--------	-------------	-------------------------	---------------	----------------------

### 3000 Series Snowblades

SB300006	72	30	750	10,000 lbs.
SB300007	84	30	900	
SB300008	96	30	950	
SB300009	108	30	1,000	
SB300010	120	30	1,060	

### 4000 Series Snowblades

SB400009	108	34	1,600	25,000 lbs.
SB400010	120	34	1,650	
SB400012	144	34	1,925	
SB400014	168	34	2,050	40,000 lbs.

### 5000 Series Snowblades

SB500010	120	42	2,130
SB500012	144	42	2,405
SB500014	168	42	2,720
SB500016	192	42	2,960

## SNOWPUSHERS

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
--------	-------------	-------------------------	---------------	----------------------

### 2500 Series Snowpushers

SP250072	72	30	525	5,000 lbs.
SP250084	84	30	555	
SP250096	96	30	595	

### 3500 Series Snowpushers

SP350007	84	38	805	15,000 lbs.
SP350008	96	38	855	
SP350009	108	38	905	
SP350010	120	38	955	
SP350012	144	38	1,205	

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
--------	-------------	-------------------------	---------------	----------------------

### 3800 Series Snowpushers

SP380010	120	38	1,350	20,000 lbs.
SP380012	144	38	1,450	
SP380014	168	38	1,550	
SP380016	192	38	1,800	

### 4500 Series Snowpushers

SP450010	120	34	1,800	25,000 lbs.
SP450012	144	34	2,075	
SP450014	168	34	2,300	

### 5500 Series Snowpushers

SP550012	144	42	2,900	40,000 lbs.
SP550014	168	42	3,165	
SP550016	192	42	3,400	

## V-BLADE

Part #	Width Closed (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
--------	--------------------	-------------------------	---------------	----------------------

### V-Blade

VP48 (Std.)	48	24	405	10,000 lbs.
VP54 (Std.)	54	24	420	
VP60 (Std.)	60	24	435	

# SNOWWING

Part #	Width Closed (in.)	Width Open (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
<b>3200W Series Snowwing</b>					<b>10,000 lbs.</b>
SB3200W611	72	132	30	1,300	
SB3200W712	84	144	30	1,360	
SB3200W813	96	156	30	1,420	
SB3200W914	108	168	30	1,480	
SB3200W1015	120	180	30	1,550	
<b>4200W Series Snowwing</b>					<b>25,000 lbs.</b>
SB4200W814	93.5	165.5	34	2,050	
SB4200W915	108	180	34	2,090	
SB4200W1016	120	192	34	2,140	
SB4200W1218	144	216	34	2,415	
SB4200W1420	168	240	34	2,540	
<b>5200W Series Snowwing</b>					<b>40,000 lbs.</b>
SB5200W915	108	180	42	2,950	
SB5200W1016	120	192	42	3,050	
SB5200W1218	144	216	42	3,320	
SB5200W1420	168	240	42	3,585	
SB5200W1622	192	264	42	3,855	
<b>5206W Series Snowwing</b>					<b>40,000 lbs.</b>
SB5206W921	108	252	42	4,390	
SB5206W1022	120	264	42	4,490	
SB5206W1224	144	288	42	4,760	
SB5206W1426	168	312	42	5,030	
SB5206W1628	192	336	42	5,300	

# SPECIALTY BLADES

Part #	Width Straight (in.)	Width Veed (in.)	Width Scooped (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
<b>3600 Six-Way Blade</b>						<b>10,000 lbs.</b>
SB3600V54	54	51	39	30	565	
SB3600V60	60	56	43	30	640	
SB3600V66	66	61	48	30	715	
SB3600V72	72	66	53	30	790	
SB3600V78	78	71	58	30	865	
SB3600V84	84	76	63	30	940	
<b>4600 Six-Way Blade</b>						<b>25,000 lbs.</b>
SB4600V08	96	84	75	34	1,325	
SB4600V09	108	94	85	34	1,450	
SB4600V10	120	103	95	34	1,575	
SB4600V12	144	113	105	34	1,700	

# HLA RAZOR SNOWPUSHER

Width (ft.)	Section Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
<b>Razor Sectional Snow Pusher</b>				<b>25,000 lbs.</b>
RZ450010	24	34	2,550	
RZ450012	24	34	2,915	
RZ450014	24	34	3,295	

# Stay in the Cab it's an

# HLA

For the last 20 years HLA Snow has been committed to providing our customers with innovative equipment. With a comprehensive line up of snow and ice management tools HLA Snow has the right blade, bucket, or spreader for your team.

HLA Snow products are engineered and field tested by our dedicated staff. They bear the cold and scrape their knuckles in real world environments to ensure that when you receive your HLA product, it performs as promised.

On those cold dark nights when the snow won't stop falling, you can stay in the cab and rest easy because it's an HLA.



8082 Road 129, R.R.#3  
Listowel, ON, Canada N4W 3G8  
Tel. (519) 291-4162  
Toll Free (866) 567-4162  
Fax (519) 291-5388  
sales@horstwelding.com

[www.horstwelding.com](http://www.horstwelding.com)  
[www.hlasnow.com](http://www.hlasnow.com)

**Authorized Dealer:**